




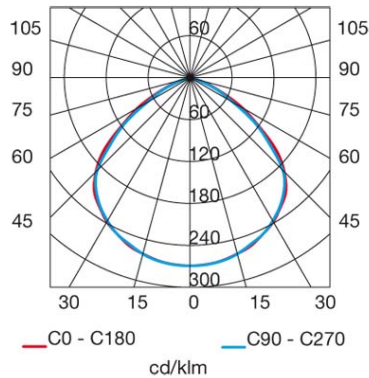

The photograph may not match the reference exactly. Please read the product description to identify the finish.

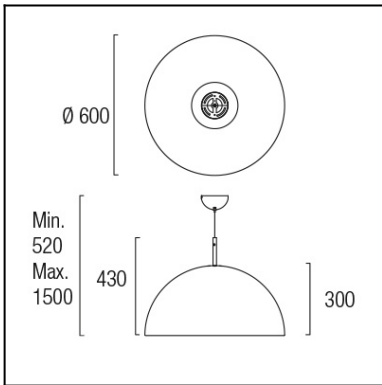

Download photometric file .ldt /.ies

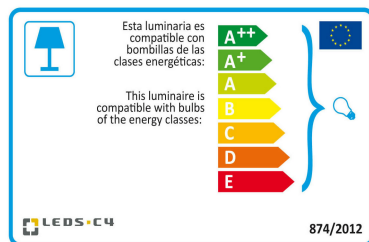

Click on image to download energy label

TECHNICAL CHARACTERISTICS

Type:	Pendant
IP Protection degrees:	IP20
Light source 1:	3 x E14 MAX 11W Maximum lamp length: 145.00 mm Maximum lamp diameter: 45.00 mm
Total power consumption (W):	33
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	1
Net Weight (Kg):	4.2
EAN:	8435111059173




MATERIALS / FINISHES

Structure material:	Steel Methacrylate	Diffuser material:	Glass Fabric shade
Structure finish:	Golden Black lacquered	Diffuser finish:	Tinted Golden

Luminaire			Measur.			Lamp	
Code	00-2727-AP-05		Code	00-2727-AP-05		Code	DLX EL LL 11W827E14
Name	Colgan UMBRELLA 3x11W E14 opal		Name	Colgan UMBRELLA 3x11W E14 opal		Number	3
Line	Eulumdat		Date	22-09-2010		Position	
Efficiency			34.40%		Coordinate system	CG	Total Flux
Maximum value			269.32 cd		Position	C=0.00 G=0.00	Double Symmetrical
Round Luminaire			Diam.	600 mm	Height	300 mm	
Round Luminous Area			Diam.	540 mm	Height	1 mm	
Horizontal Luminous Area			0.229022 m2		Emitting area on Plane 180°		0.000540 m2
Emitting area on Plane 0°			0.000540 m2		Emitting area on Plane 270°		0.000540 m2
Emitting area on Plane 90°			0.000540 m2		Glare area at 76°		0.055929 m2
Symmetry Type			Double Symmetrical		Maximum Gamma Angle		90
Measurement Distance			0.00		Measurement Flux		1890.00 lm
Operator			Asselum		Source voltage		
Temperature			25.00 °C		Source current		
Humidity			60.00 %		Photocell		
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	DLX EL LL 11W827E14	DLX EL LL 11W827E14 - 11.00 W	630.00	11.00	3	
C.I.E.	57 91 99 100 34	D DIN 5040		A40		
F UTE	0.34 C	B NBN		BZ 3		

Diam=600mm



C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 34.40 %
RN 0.00 %

