


Design by Francesc Vilaró



The photograph may not match the reference exactly. Please read the product description to identify the finish.

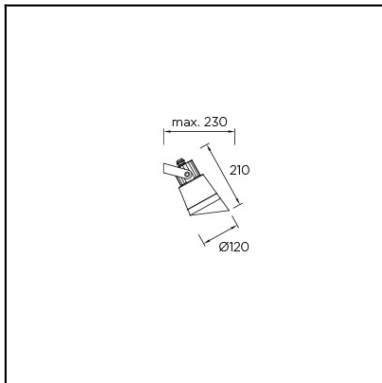


TECHNICAL CHARACTERISTICS

Type:	Spotlight
Adjustable:	Adjustable $\pm 90^\circ$ on the horizontal axis.
IP Protection degrees:	IP65
IK Protection degrees:	IK06
Light source 1:	1 x GU10 MAX 35W Maximum lamp length: 80.00 mm
Light source 2:	1 x GU5.3 MAX 35W Maximum lamp length: 80.00 mm
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	12
Net Weight (Kg):	0.73
EAN:	8435381420796




MATERIALS / FINISHES


Structure material:	Technopolymer	Diffuser material:	Glass
Structure finish:	White	Diffuser finish:	Tempered





Download photometric file .ldt /.ies

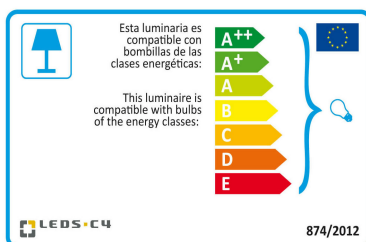


Click on image to download energy label

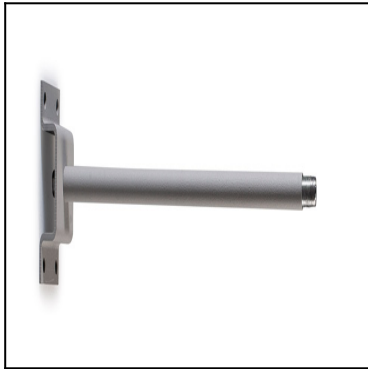71-9487-34-34V1


Structure material: Galvanized steel
Structure finish: Grey

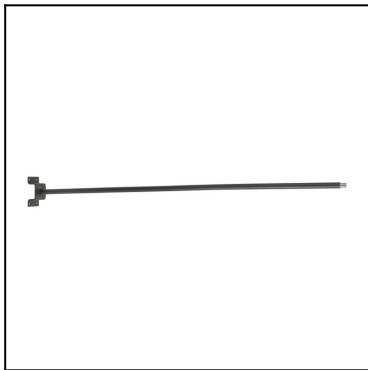
71-9487-Z5-Z5V1


Structure material: Galvanized steel
Structure finish: Urban grey


71-9746-05-05



Structure material: Polycarbonate
Structure finish: Black



Luminaire		Measur.		Lamp	
Code	05-9722-14-37	Code	05-9722-05-37	Code	HALOPAR 16 50W
Name	HALOPAR 16 50W Aluminium-Reflektor	Name	HALOPAR 16 50W Aluminium-Reflektor	Number	1
Line	Eulmdat	Date	27-01-2014	Position	
Efficiency	100.00%	Coordinate system	CG	Total Flux	525.00 lm
Maximum value	1202.32 cd	Position	C=0.00 G=1.00	Rotosymmetrical	
Round Luminaire	Diam.	51 mm	Height	53 mm	
Round Luminous Area	Diam.	51 mm	Height	0 mm	
Horizontal Luminous Area	0.002043 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.000494 m2	
Symmetry Type	Rotosymmetrical		Maximum Gamma Angle	180	
Measurement Distance	0.00		Measurement Flux	525.20 lm	
Operator			Source voltage		
Temperature	25.00 °C		Source current		
Humidity	60.00 %		Photocell		
Notes					

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulmdat	HALOPAR 16 50W	HALOPAR 16 50W - 50.00 W	525.00	50.00	1	
C.I.E.	82 94 97 100 100	D DIN 5040		A60		
F UTE	1.00 B	B NBN		BZ 1		


Diam=51mm





C Halfplanes

180.0 — 0.0

ULOR 0.11 %
DLOR 99.89 %
RN 0.11 %

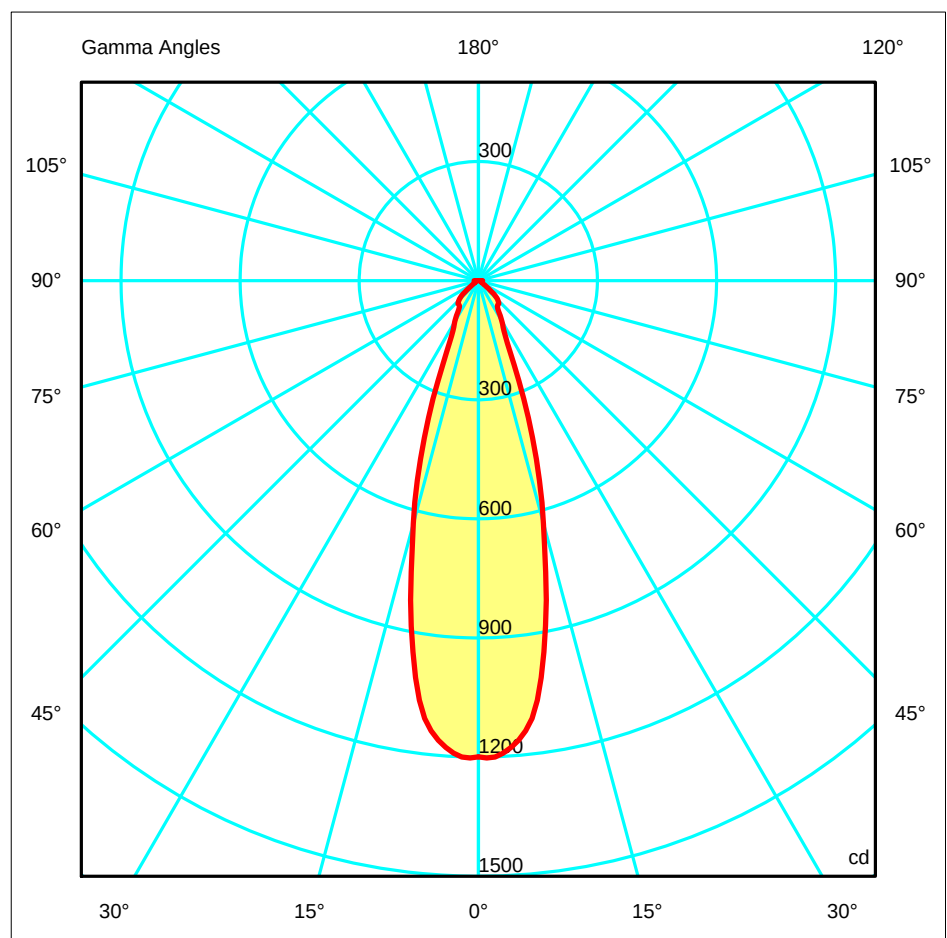

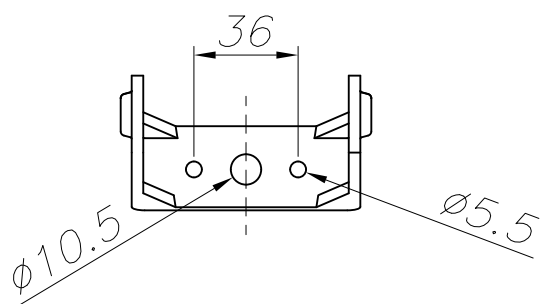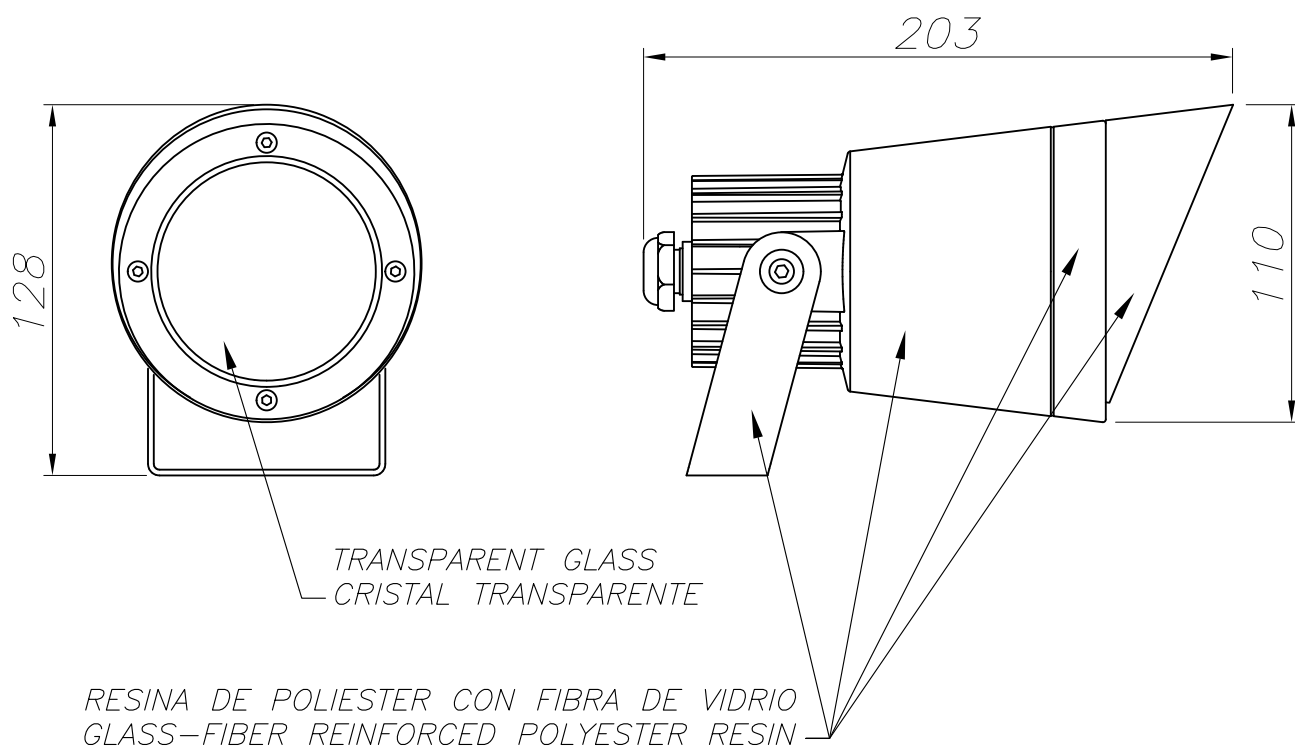

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

