




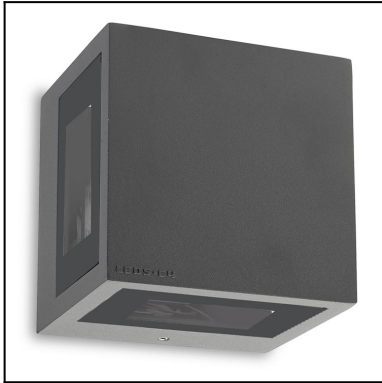

The photograph may not match the reference exactly. Please read the product description to identify the finish.

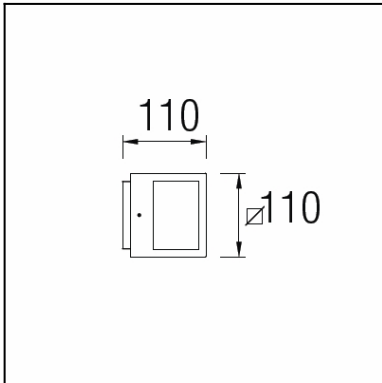

[Download photometric file .ldt / .ies](#)

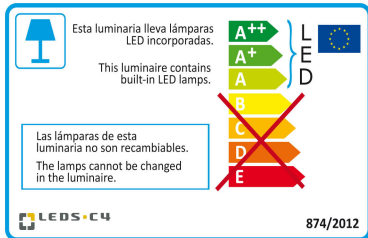

[Click on image to download energy label](#)

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP65
IK Protection degrees:	IK03
Light source 1:	4 x LED Philips 8,1W Neutral white - 4000K 732 lm ^(N) CRI 85
Total power consumption (W):	11W
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	6
Net Weight (Kg):	1.16
EAN:	8435381439903



MATERIALS / FINISHES

Structure material: High purity aluminium

Structure finish: Urban grey

Diffuser material: Glass

Diffuser finish: Transparent

GEAR

Multi-voltage electronic gear included (100-240V / 50-60Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

LED S-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.

Please consult the sales team to clarify any doubt.

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

Luminaire

Code 05-9732-34-CMV1+FE
Name Aplique POKER 8.1W+filtr extr.


Measurem.

Code 05-9732-34-CMV1+FE
Name Aplique POKER 8.1W+filtr extr.

Luminaire Flux	66.04 lm	Luminaire Power	11.00 W	Efficacy	6.00 lm/W	Efficiency	100.00%
Lamps Flux	66.04 lm	Maximum value	66.28 cd	Position	C=90.00 G=5.00	CG	Asymmetrical
Rectangular Luminaire		Length	110 mm	Width	110 mm	Height	110 mm
Rectangular Luminous Area		Length	30 mm	Width	2 mm	Height	110 mm
Horizontal Luminous Area		0.000060 m2		Emitting area on Plane 180°		0.003300 m2	
Emitting area on Plane 0°		0.003300 m2		Emitting area on Plane 270°		0.000220 m2	
Emitting area on Plane 90°		0.000220 m2		Glare area at 76°		0.003216 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		21-07-2016		Maximum Gamma Angle		180	
Measurement Distance		0.51		Measurement Flux		66.04 lm	
Operator		Asselum T3		Source voltage		230.00 V	
Temperature		25.00 °C		Source current			
Humidity		50.00 %		Photocell		Czibula Grundmann	
Notes							

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
- LEDS C4 LEDS		05-9732-34-CMV1+FE		Name Lámpara leds 8.1W		66.04	11.00	1
C.I.E.	51 52 49 50 100			D DIN 5040	C41			
F UTE	0.50 D + 0.50 T			B NBN	BZ 3 / 0.6 / BZ 4 / 0.8 / BZ 5 / 1.25 / BZ 6 / 1.5 / BZ 7 / 2 / B			


110mm x 110mm



Semiplanos C

180.0 — 0.0
270.0 — 90.0

ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

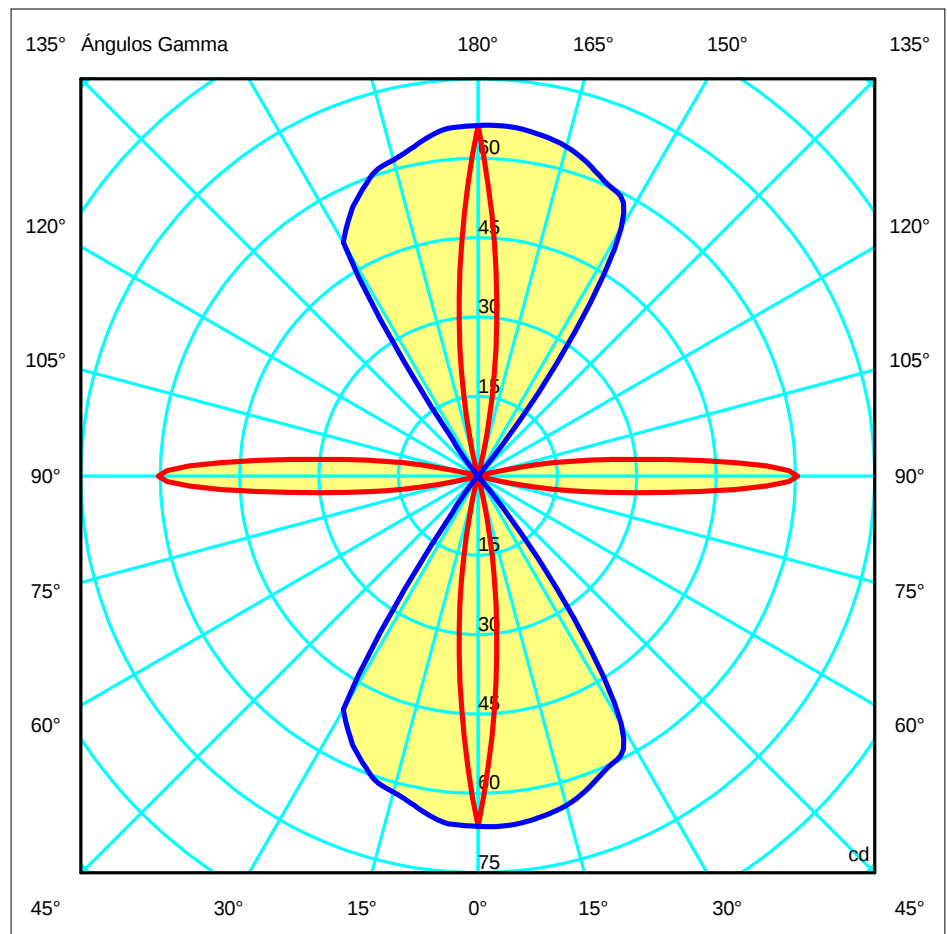

Luminaire

Code 05-9732-34-CMV1
Name Aplique leds POKER 8.1W


Measurem.

Code 05-9732-34-CMV1
Name Aplique leds POKER 8.1W

Luminaire Flux	415.87 lm	Luminaire Power	11.00 W	Efficacy	37.81 lm/W	Efficiency	100.00%
Lamps Flux	415.87 lm	Maximum value	72.19 cd	Position	C=90.00 G=5.00	CG	Asymmetrical
Rectangular Luminaire		Length	110 mm	Width	110 mm	Height	110 mm
Rectangular Luminous Area		Length	30 mm	Width	40 mm	Height	110 mm
Horizontal Luminous Area		0.001200 m2		Emitting area on Plane 180°		0.003300 m2	
Emitting area on Plane 0°		0.003300 m2		Emitting area on Plane 270°		0.004400 m2	
Emitting area on Plane 90°		0.004400 m2		Glare area at 76°		0.003492 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		20-07-2016		Maximum Gamma Angle		180	
Measurement Distance		6.44		Measurement Flux		415.87 lm	
Operator		Asselum T2		Source voltage		230.00 V	
Temperature		25.00 °C		Source current			
Humidity		46.00 %		Photocell		Prc	
Notes							

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
- LED S C4 LED S		05-9732-34-CMV1		Name Lámpara leds 8.1W		415.87	11.00	1
C.I.E.	44 58 79 50 100			D DIN 5040		C31		
F UTE	0.50 F + 0.50 T			B NBN		BZ 5 / 1 / BZ 6		


110mm x 110mm



Semiplanos C

180.0 — 0.0
270.0 — 90.0


ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

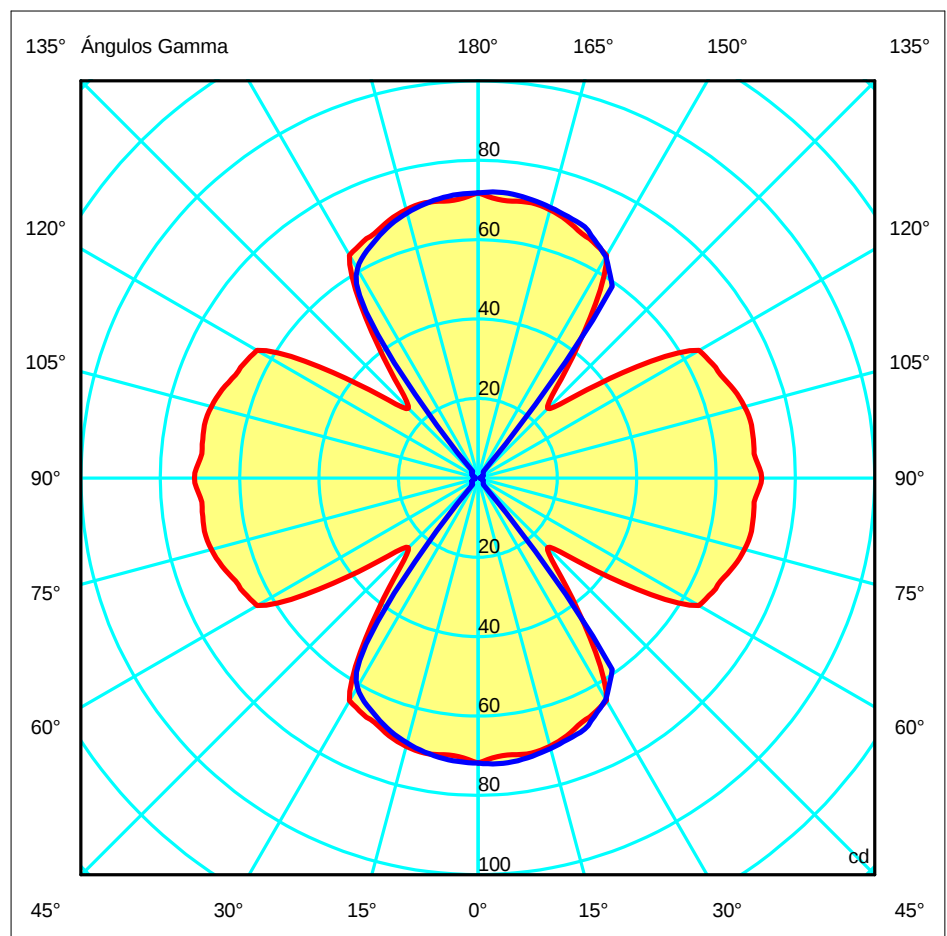

Luminaire			Measurem.			Lamp	
Code	05-9732		Code	05-9732		Code	1885
Name	WALL FIXTURES		Name	WALL FIXTURES		Number	1
Line	Eulmdat		Date	11-02-2014		Position	
Efficiency		85.76%	Coordinate system		CG	Total Flux	
Maximum value		2437.53 cd	Position		C=90.00 G=91.00	Asymmetrical	
Rectangular Luminaire Rectangular Luminous Area Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	Length	1 mm	Width	1 mm	Height	1 mm	
	Length	1 mm	Width	1 mm	Height	0 mm	
			Emitting area on Plane 180°		0.000000 m2		
			Emitting area on Plane 270°		0.000000 m2		
				Glare area at 76°		0.000000 m2	
Symmetry Type		Asymmetrical	Maximum Gamma Angle		180		
Measurement Distance		0.00	Measurement Flux		670.90 lm		
Operator			Source voltage				
Temperature		25.00 °C	Source current				
Humidity		60.00 %	Photocell				
Notes							

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulmdat	1885	1885 - 11.30 W	670.90	11.30	1
C.I.E.	0 2 7 48 86	D DIN 5040			
F UTE	--	B NBN	C12	BZ 10	


1mm x 1mm




C Halfplanes

180.0 — 0.0
270.0 — 90.0


ULOR 44.19 %
DLOR 41.57 %
RN 51.53 %

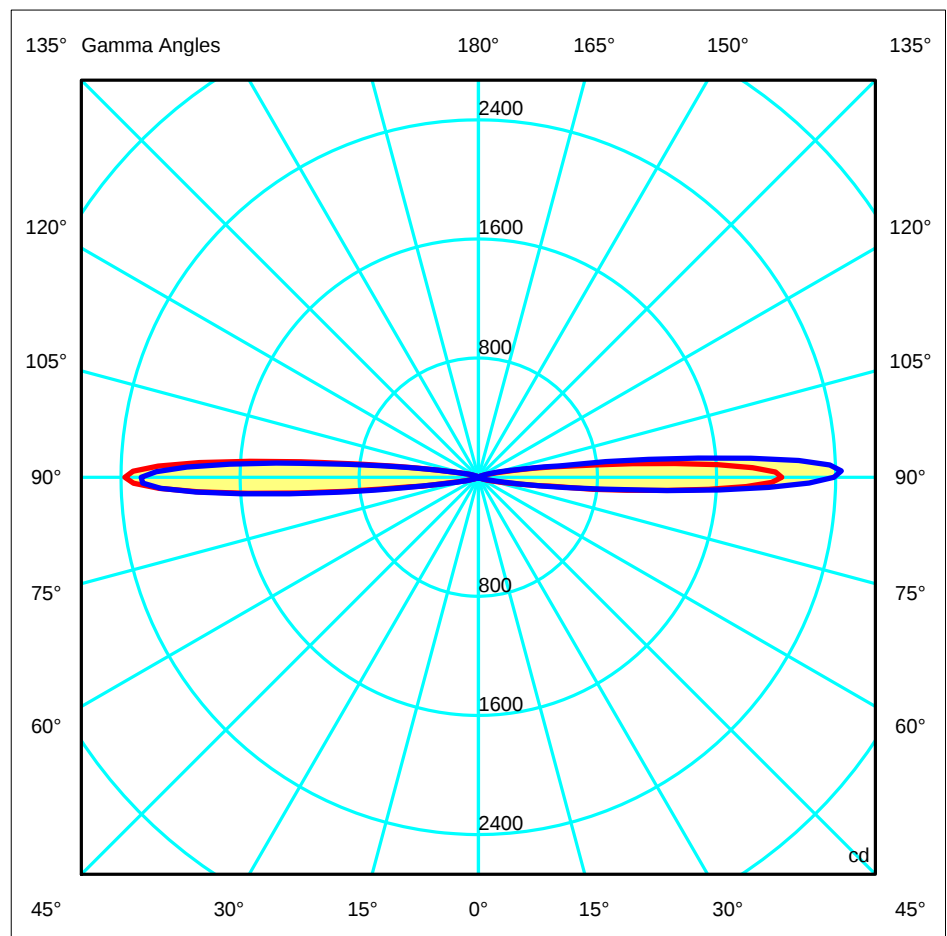

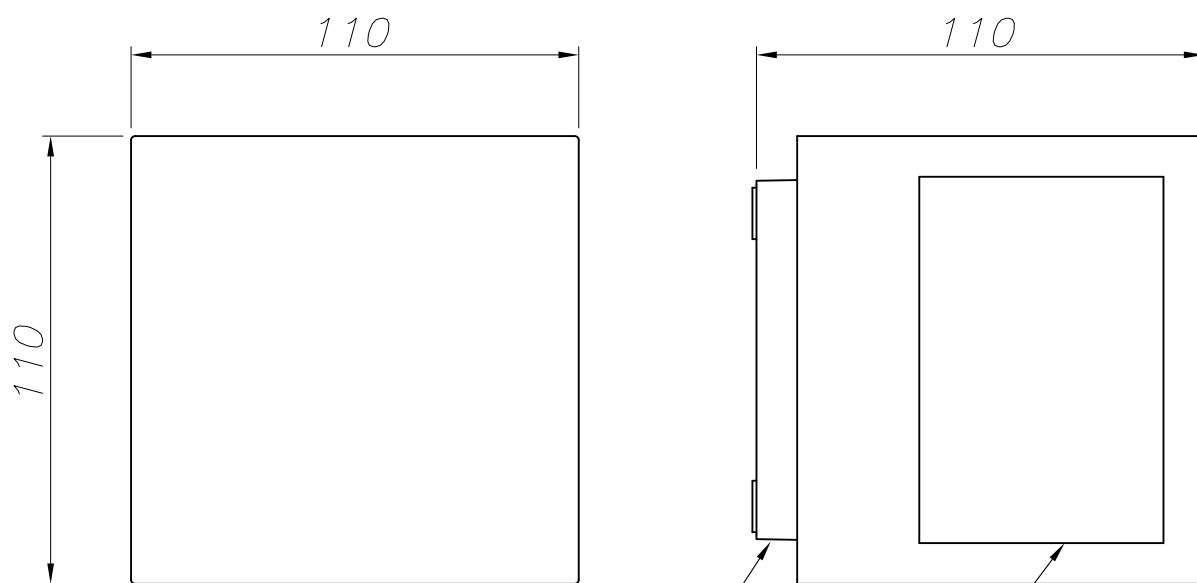

ALUMINIO INYECTADO
INJECTED ALUMINIUM

CRISTAL TRANSPARENTE PINTADO INTERIOR
TRANSPARENT GLASS PAINTED INSIDE

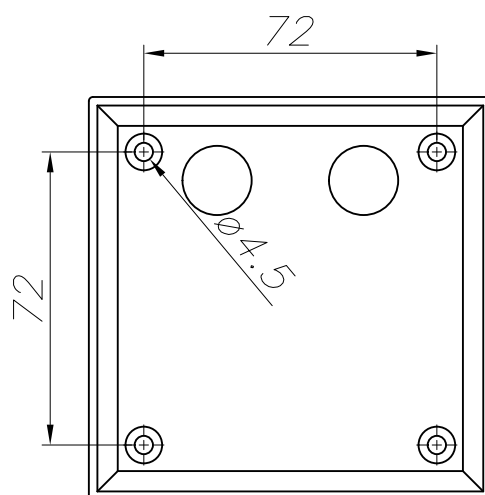

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

