


05-9833-05-CM

V0

BASIC Wall recessed



Description

Recessed for outdoor use.

For frontal lighting. Suitable for installation in marine environments. Structure material: Polycarbonate + ABS. Structure finish: Black. Diffuser material: Polycarbonate. Diffuser finish: Matt. UV protection. Warranty: 5 Years.

Finish
Black
Matt

Material
Polycarbonate + ABS
Polycarbonate

IP65 IK10 20

TECHNICAL CHARACTERISTICS


Light source
Light source: LED SUNPU
Output (W): 1.5W
Total power consumption (W): 1.5W
Color temperature: Neutral white - 4000K
CRI: 75
Real Lumen: 83
Nominal Lumen: 160
Qty Leds: 20
Lm/Real W: 55
Life Time: 36.000h L70B30
Bin / Grup: 4000K
MacAdam steps: 3
UGR: 17.9
Photobiological risk: RG0

GEAR
Brand: DRIVER AC
Gear included: Yes, electronic
Voltage / Frequency: 110-240VAC/50-60Hz
Power Factor: 0.48



Luminaire
Double cable exit: No
Drainage: No
Seaside: Yes
Uv Protection: Yes
Warranty: 5 Years

Logistics
Energy Efficiency: LED A++
EAN Code: 8435381421465
Net Weight (Kg): 0.285
Weight in Kg (packaged): 0.396
Packing: 150 x 120 x 150
Masterbox: 20




The photograph may not match the reference exactly. Please read the product description to identify the finish.

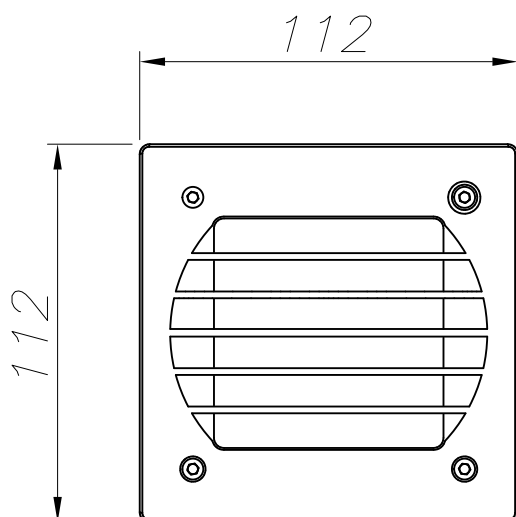

PP REFORZADO FIBRA VIDRIO
FIBERGLASS REINFORCED PP

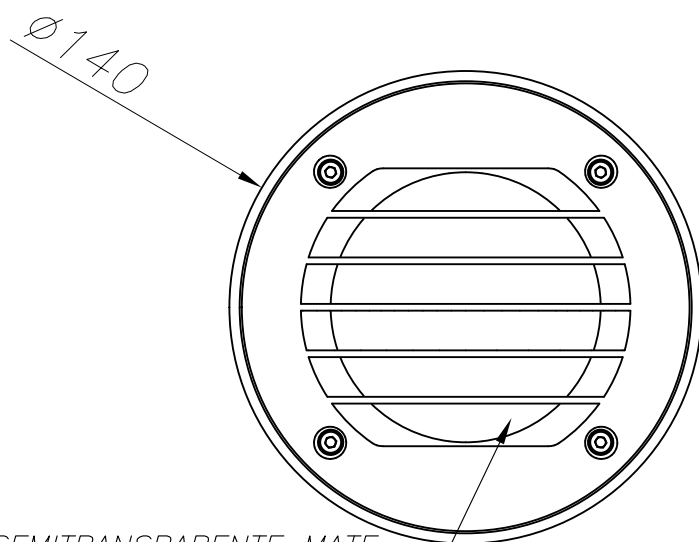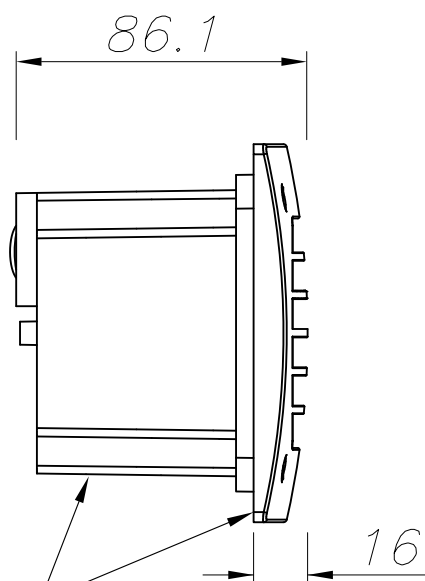

PC SEMITRASPARENTE MATE
SEMITRASPARENT MATT PC

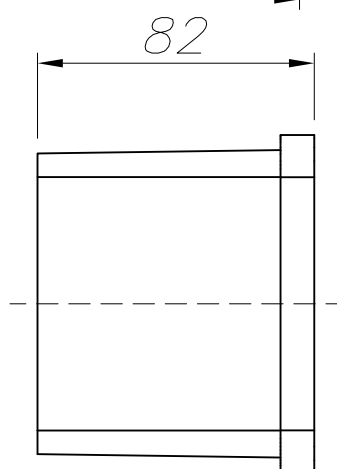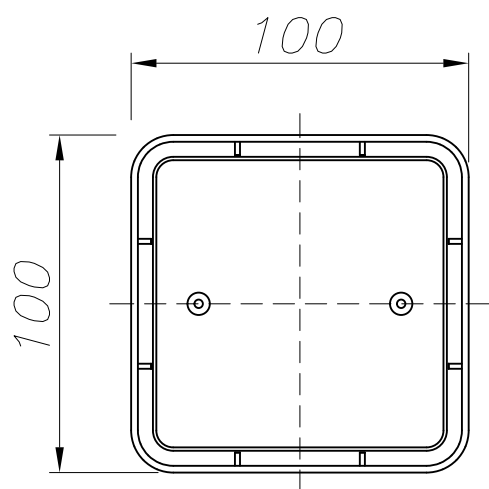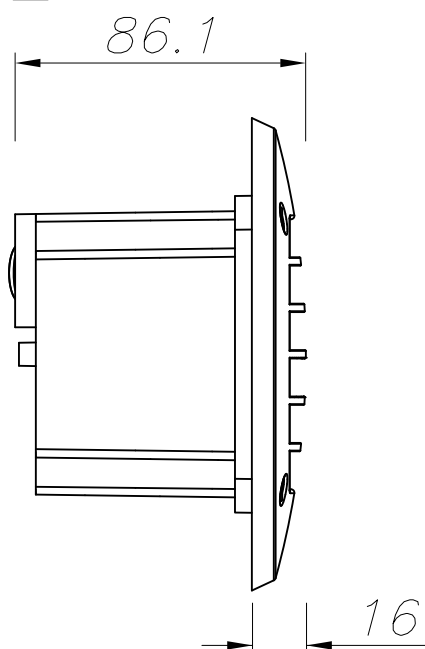

CAJA DE EMPOTRAR
FLUSH FITTING BOX

