

05-9930-Z5-CM

V1

CUBE Spotlight

Description

LED Spotlight

For downlighting.. Structure with double body design to prevent heat generated by the LED affecting the useful life of the driver. Suitable for installation in marine environments. Includes 2 cable outlets to facilitate chain mounting. Adjustable light source. Structure material: High purity aluminium. Structure finish: Urban grey. Diffuser material: Polycarbonate. Diffuser finish: Transparent. UV protection. Warranty: 5 Years.

Finish
Urban grey
Transparent

Material
High purity aluminium
Polycarbonate

IP65 IK10 29° ±90° 4

TECHNICAL CHARACTERISTICS

Light source
Light source: LED CREE
Output (W): 54W
Total power consumption (W): 60.5 W
Color temperature: Neutral white - 4000K
CRI: 80
Real Lumen: 4956
Nominal Lumen: 6339
Qty Leds: 16
Lm/Real W: 82
Life Time: 45.000h L80B20
Bin / Grup: 5A3 o 5D2
MacAdam steps: 3
UGR: 14
Photobiological risk: RG2

GEAR
Brand: HEP
Gear included: Yes, electronic
Voltage / Frequency: 100-240VAC/50-60Hz
Power Factor: 0.90
Dimming protocol: 1..10V
Flickering: 14.4%

Luminaire
Double cable exit: Yes
Drainage: No
Seaside: Yes
Uv Protection: Yes
Warranty: 5 Years

Logistics
Energy Efficiency: LED A++
EAN Code: 8435526800735
Net Weight (Kg): 2.318
Weight in Kg (packaged): 2.650
Packing: 235 x 170 x 180
Masterbox: 4

The photograph may not match the reference exactly. Please read the product description to identify the finish.

OPTIONAL ACCESSORIES




71-9487-Z5-Z5V1

Structure material: Galvanized steel
Net Weight (Kg): 0.790




71-9943-Z5-Z5


Structure material: Aluminium
Net Weight (Kg): 0.120

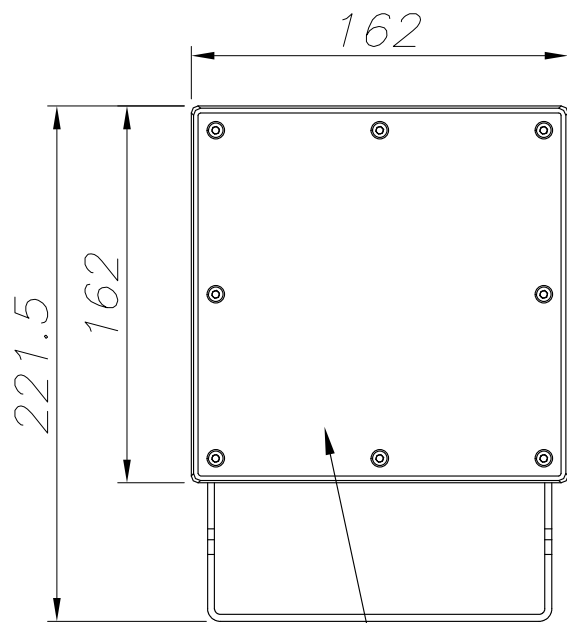



PC TRANSPARENTE
TRANSPARENT PC

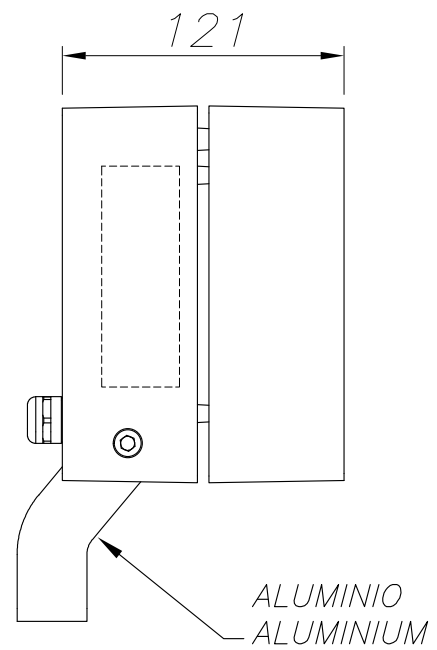

ALUMINIO
ALUMINIUM

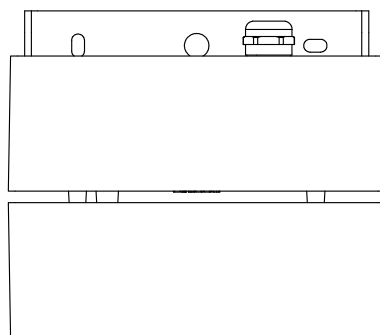

ALUMINIO INYECTADO
INJECTED ALUMINIUM

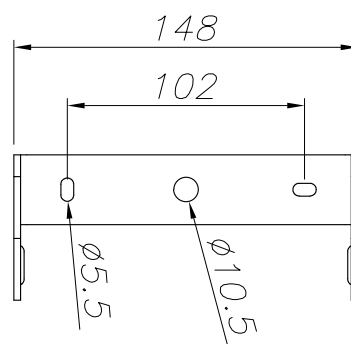

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

