





The photograph may not match the reference exactly. Please read the product description to identify the finish.

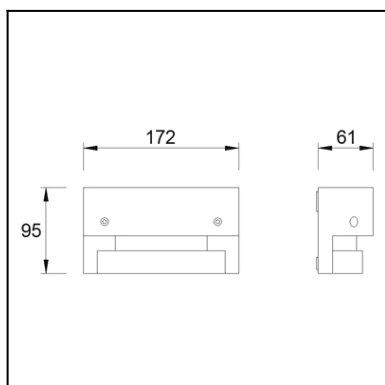

[Download photometric file .ldt / .ies](#)

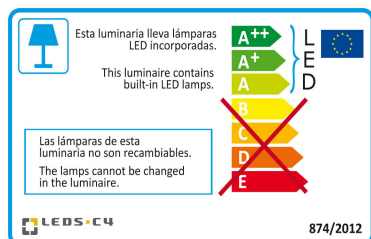

[Click on image to download energy label](#)

TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP65
Light source 1:	2 x LED Cree 4.2W Neutral white - 4000K 446 lm ^(N) CRI 75
Total power consumption (W):	5.4W
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	12
EAN:	8435381449933



MATERIALS / FINISHES

Structure material:	High purity aluminium	Diffuser material:	Polycarbonate
Structure finish:	Grey	Diffuser finish:	Transparent

GEAR

Multi-voltage electronic gear included (100-240V / 50-60Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

LEDS-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.

Please consult the sales team to clarify any doubt.

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

Luminaire

Code 10-9903-34-CM
Name Portatil FINESTRA 2 leds 4.2W


Measurem.

Code 10-9903-34-CM
Name Portatil FINESTRA 2 leds 4.2W

Luminaire Flux	280.71 lm	Luminaire Power	4.00 W	Efficacy	70.18 lm/W	Efficiency	100.00%
Lamps Flux	280.72 lm	Maximum value	739.14 cd	Position	C=30.00 G=5.00	CG	Sym. on planes 270-90
Rectangular Luminaire		Length	95 mm	Width	173 mm	Height	45 mm
Rectangular Luminous Area		Length	17 mm	Width	173 mm	Height	28 mm
Horizontal Luminous Area		0.002941 m2		Emitting area on Plane 180°		0.000476 m2	
Emitting area on Plane 0°		0.000476 m2		Emitting area on Plane 270°		0.004844 m2	
Emitting area on Plane 90°		0.004844 m2		Glare area at 76°		0.001173 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 270-90	
Date		03-03-2016		Maximum Gamma Angle		180	
Measurement Distance		6.44		Measurement Flux		280.72 lm	
Operator		Asselum T2		Source voltage		230.00 V	
Temperature		24.00 °C		Source current			
Humidity		42.00 %		Photocell		Prc	
Notes							


Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
- LED S C4 LED S		10-9903-34-CM		Name Lámpara led green 4.2W		280.72	4.00	1
C.I.E.	59 79 92 97 100			D DIN 5040	A41			
F UTE	0.97 D + 0.03 T			B NBN	BZ 2 / 0.8 / BZ 3 / 1.5 / BZ 4			



95mm x 173mm



Semiplanos C
270.0 — 0.0
180.0 — 90.0

ULOR 2.88 %
DLOR 97.12 %
RN 2.88 %

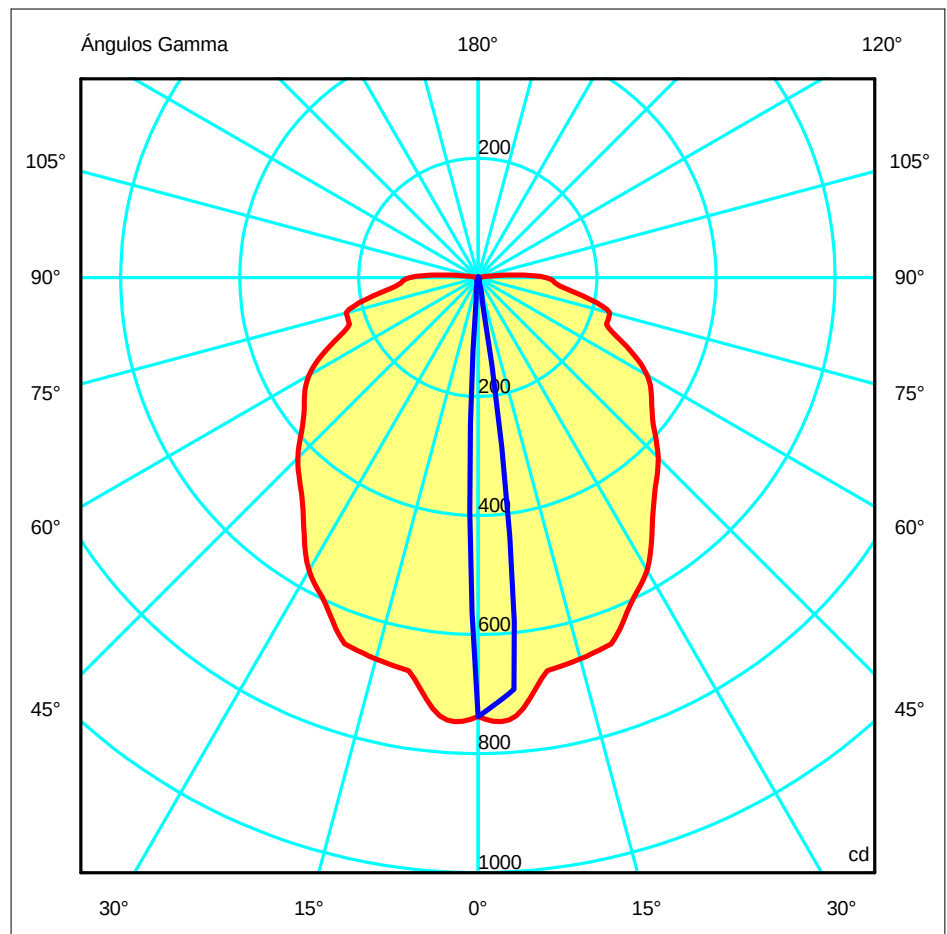

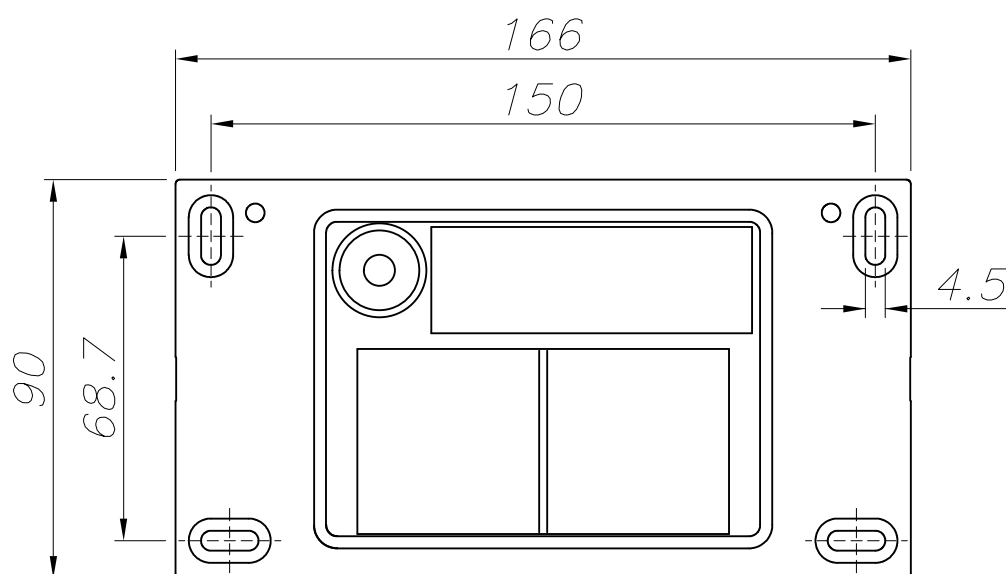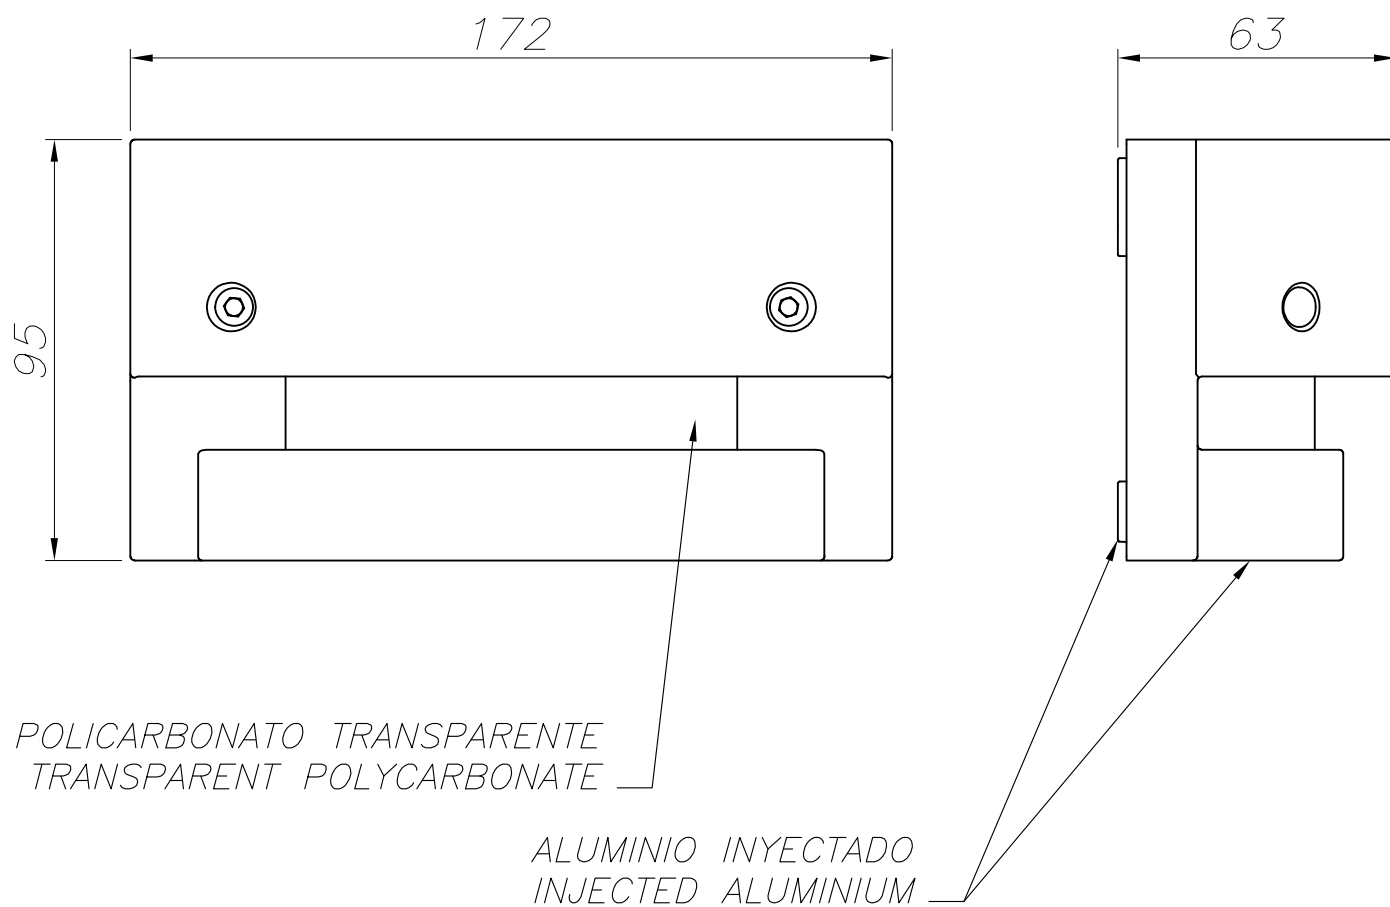

PLANTILLA DE INSTALACIÓN
INSTALLATION TEMPLATE

