





The photograph may not match the reference exactly. Please read the product description to identify the finish.

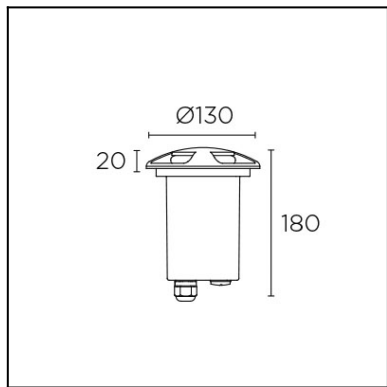

Download photometric file .ldt /.ies

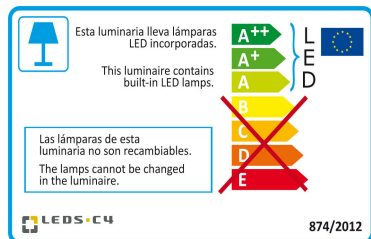

Click on image to download energy label

#### TECHNICAL CHARACTERISTICS

Type:	UPLIGHT RECESSED
IP Protection degrees:	IP67
Light source 1:	12 x LED
Bulb specified at the product label	1.2W Neutral white - 4000K 128 lm <sup>(N)</sup> CRI 75
IK Protection degrees:	IK10
Total power consumption (W):	1.5W
Angle of the optics / Reflector:	
Voltage / Frequency:	100-240VAC/50-60Hz
Warranty:	2
Option to extend the guarantee:	5
Units per box:	4
Net Weight (Kg):	0.775
EAN Code:	8435381426293



#### MATERIALS / FINISHES

**Structure material:** High purity aluminium  
Technopolymer


**Diffuser material:** Polycarbonate

**Structure finish:** Grey


**Diffuser finish:** Matt

#### GEAR

Multi-voltage electronic gear included (Yes)

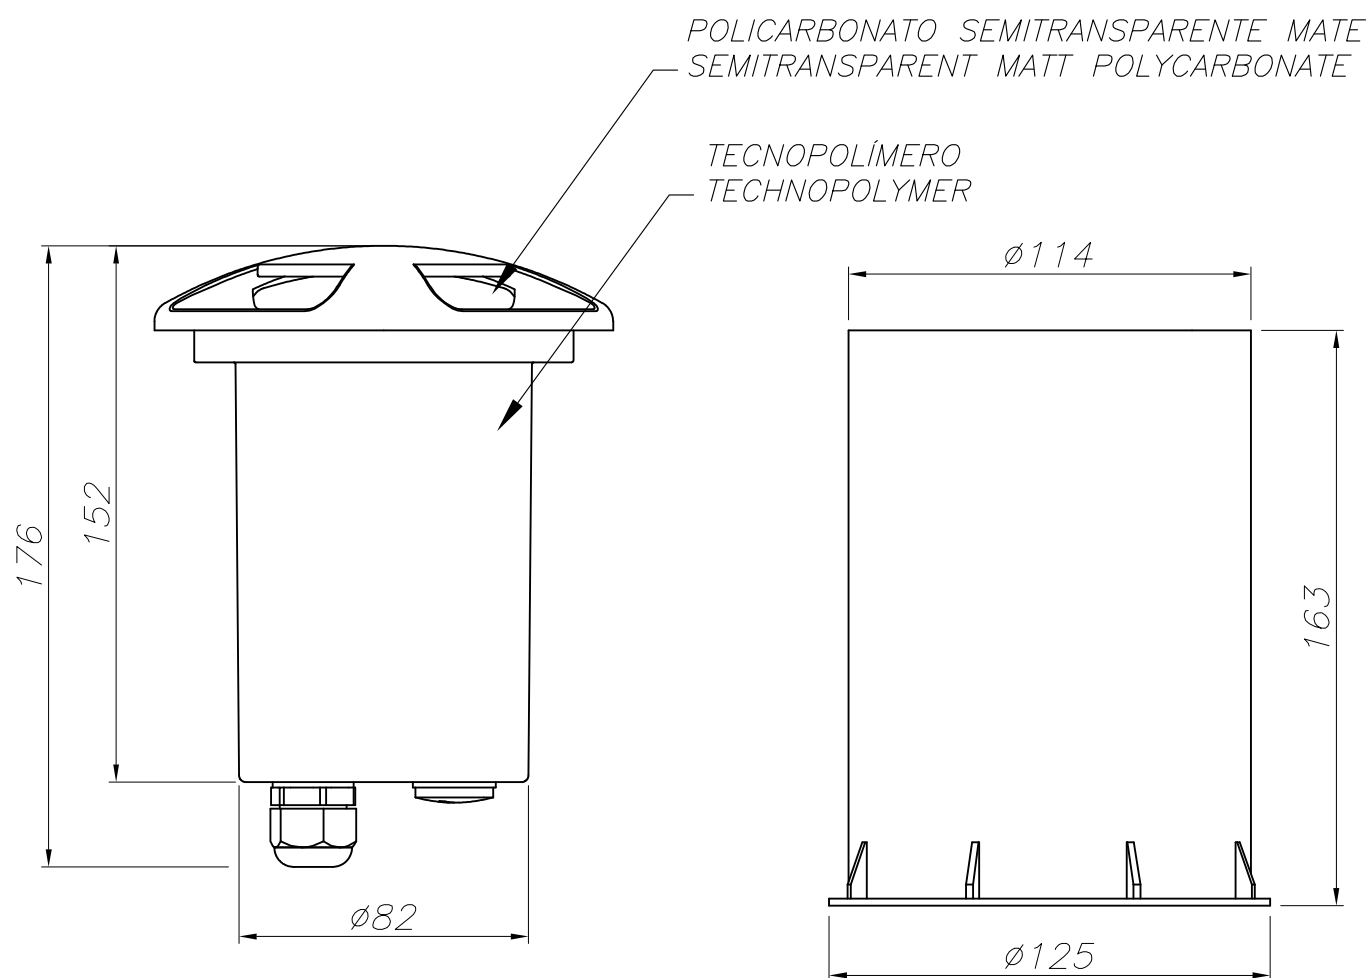


*CAJA DE EMPOTRAR*  
*FLUSH FITTING BOX*

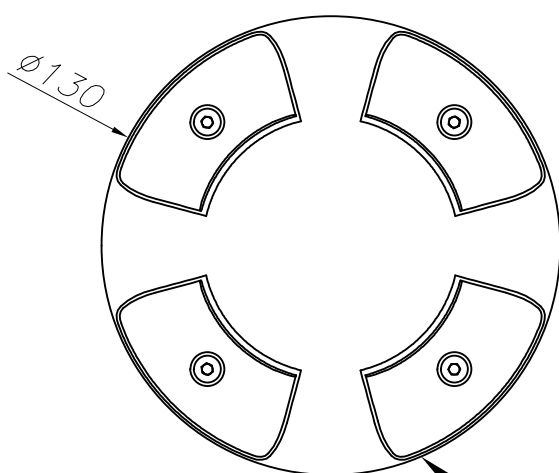


*ALUMINIO DE ALTA PUREZA*  
*HIGH QUALITY ALUMINIUM*

①


10l / 15min

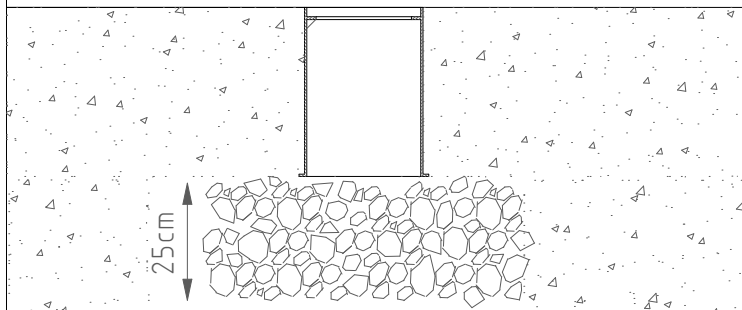
②




$\varnothing_{min}=5mm$   
 $\varnothing_{max}=10mm$

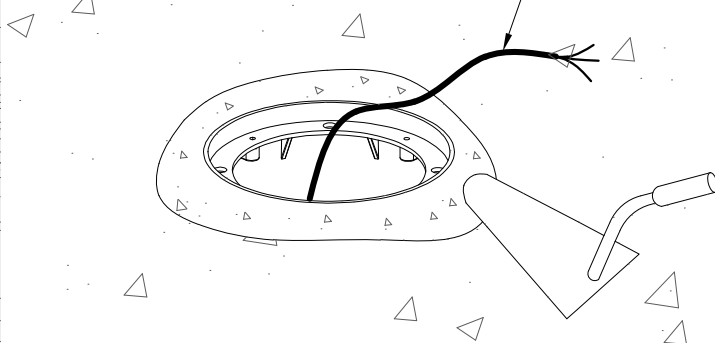


③

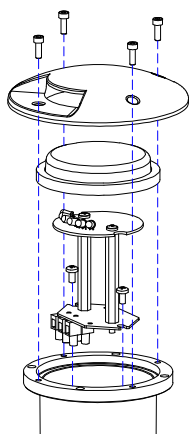


④

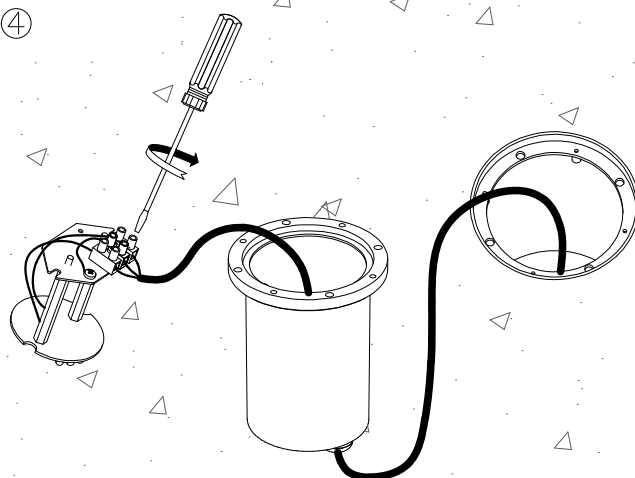


⑤

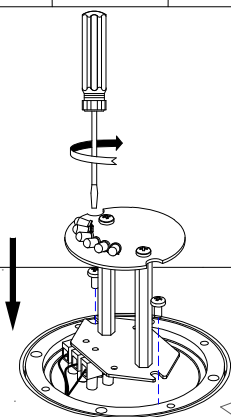

⑥

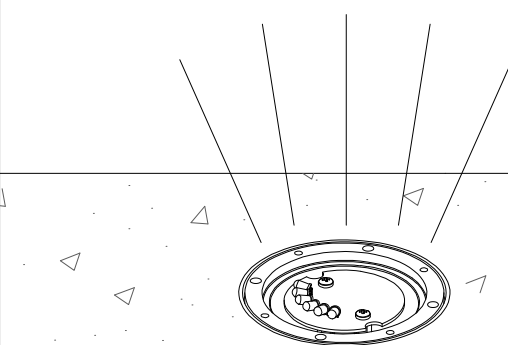

⑦

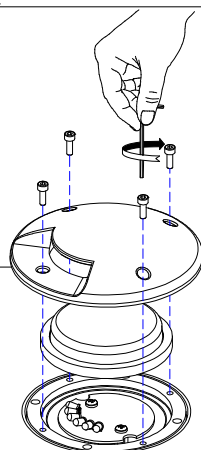

⑧

