




The photograph may not match the reference exactly. Please read the product description to identify the finish.

Download photometric file .ldt /.ies

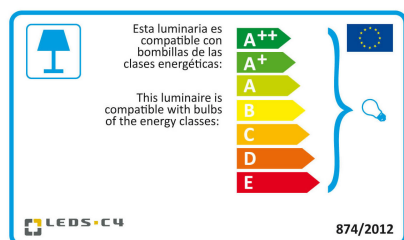

Click on image to download energy label

Description

Downlights prepared for recessed ceiling installation. Housing in plaster with a steel plate fixture. Different versions available depending on form, directability and number of lamps. Possibility of completely integrating the piece in the architecture by means of thermoplastic paint. Possibility of incorporating a GU10 lampholder as an accessory.

TECHNICAL CHARACTERISTICS

Type:	DOWNLIGHT RECESSED
IP Protection degrees:	IP23
Light source 1:	1 x GU5.3 max 35W
Voltage / Frequency:	12V/50-60Hz
Warranty (Years):	2
Units per box:	24
Net Weight (Kg):	0.47
EAN:	8435381410476



MATERIALS / FINISHES

Structure material: Plaster

Structure finish: White


GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

71-1881-00-00



Kit for GU10 lamps, Max. 50W



71-4032-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material: Aluminium
Structure finish: Grey
Diffuser material: Polycarbonate
Diffuser finish: Transparent



IP20

71-4033-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material: Aluminium
Structure finish: Grey
Diffuser material: Polycarbonate
Diffuser finish: Transparent



IP20

71-3885-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.

Structure material: Aluminium
Structure finish: Grey
Diffuser material: Polycarbonate
Diffuser finish: Transparent



IP20

71-3886-N3-M2



LED module. For installation, the light must be completed with one of the different surrounds available.


Structure material:	Aluminium
Structure finish:	Grey
Diffuser material:	Polycarbonate
Diffuser finish:	Transparent

IP20

Luminaire			Measurem.			Lamp	
Code	90-2902		Code	90-2902		Code	Halogen
Name	RECESSED LIGHT		Name	RECESSED LIGHT		Number	1
Line	GES		Date	15-11-2013		Position	
Efficiency		67.94%	Coordinate system	CG		Total Flux	430.00 lm
Maximum value		849.69 cd	Position	C=90.00 G=10.00		Asymmetrical	
Rectangular Luminaire		Length	53 mm	Width	53 mm	Height	1 mm
Rectangular Luminous Area		Length	53 mm	Width	53 mm	Height	0 mm
Horizontal Luminous Area		0.002809 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000680 m2	
Symmetry Type		Asymmetrical		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		430.00 lm	
Operator				Source voltage			
Temperature		25.00 °C		Source current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
IESNA-1995	Halogen	MR16-35W - 31.90 W	430.00	31.90	1
C.I.E.	86 94 97 100 68	D DIN 5040		A60	
F UTE	0.68 A	B NBN		BZ 1	


53mm x 53mm





C Halfplanes


180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 67.94 %
RN 0.00 %

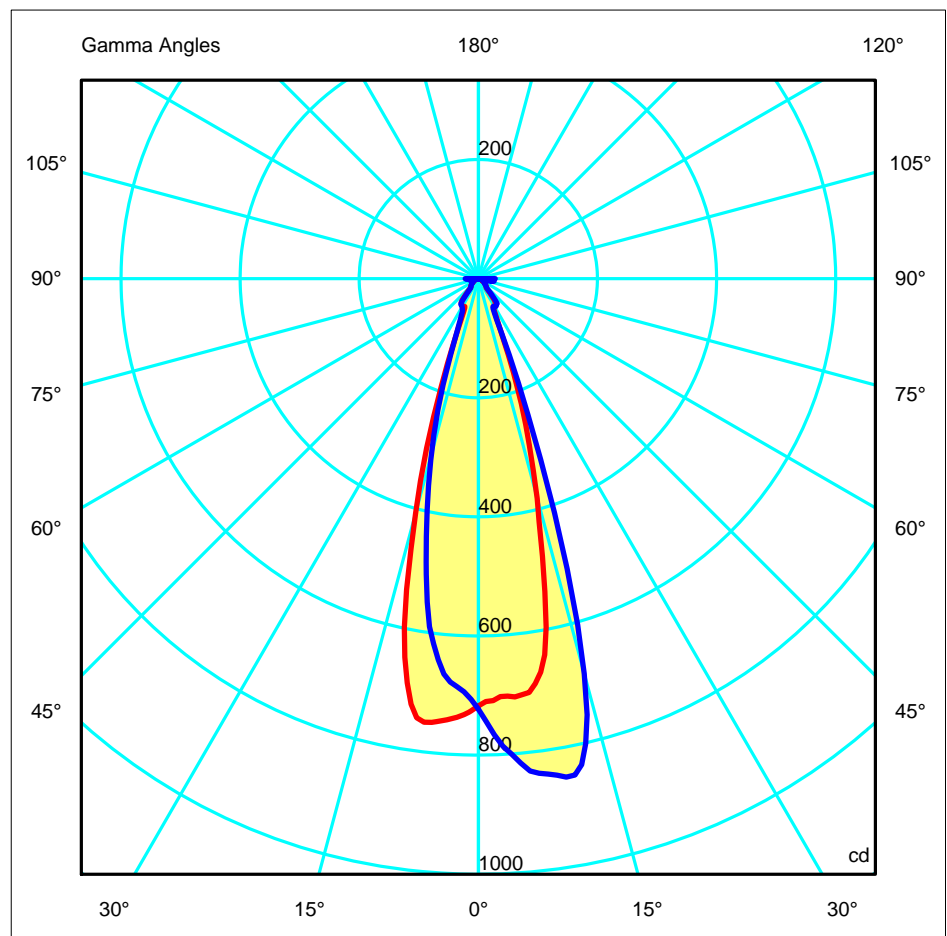

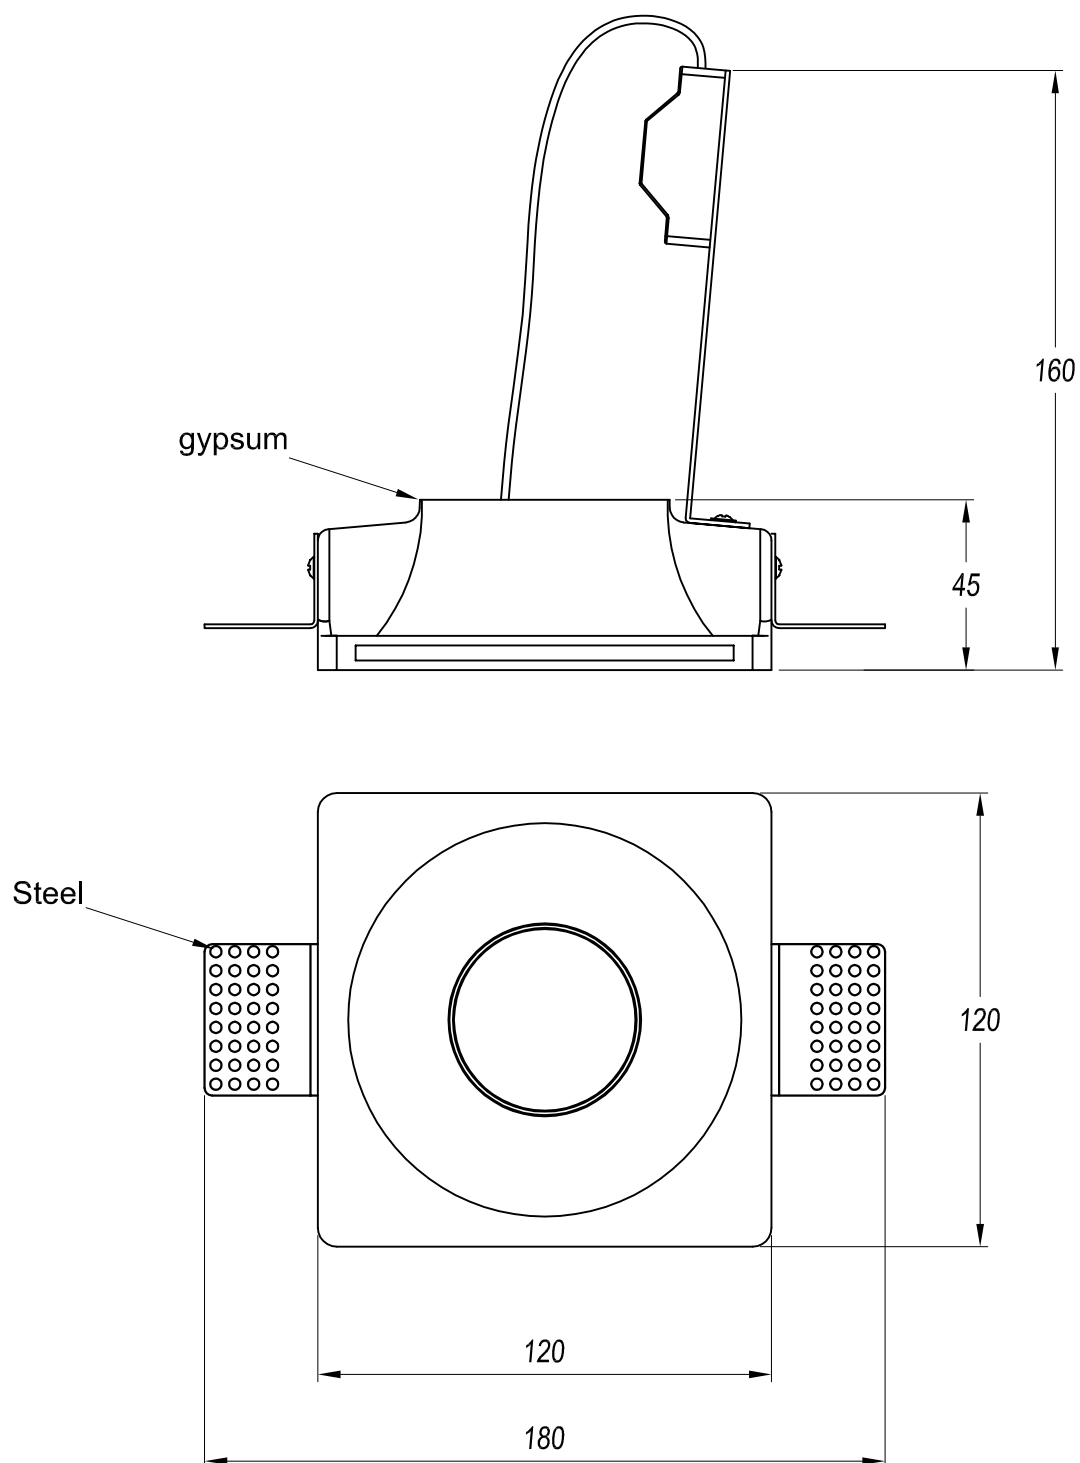

125x125 mm



9-15mm

Scale 1:2 14-10-13

REF.	LAMP	SOCKET	
90-2902	QR-CBC51 MAX 35W	GX5.3	125x125mm

